



Description




Introducing the AXS LED wall pack - the perfect solution for your outdoor lighting needs. With its adjustable power and CCT, you can customize your lighting experience to suit your preferences. The 100° beam angle ensures that your space is well-lit, providing optimal visibility and safety. The AXS LED wall pack boasts a sleek and modern design, featuring an aluminum body that is both durable and stylish. Its compact form factor makes it easy to install and unobtrusive, while still providing ample lighting coverage. With a CRI 80 rating, the AXS LED wall pack delivers true-to-life colors, enhancing the aesthetics of your space. Whether you're illuminating a commercial building, parking lot, or outdoor area, this wall pack is the perfect choice for any setting.

Wattage Adjustable: 25% or 100%

Applications

- Commercial Facilities
- Industrial Facilities


Photometry



Mounting Options

- Flush Mounting

Dimensions

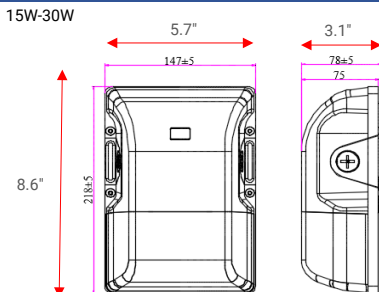

Electrical Information

Model No.	AXS-15	AXS-20	AXS-30
Power Consumption(±10%)	15W	20W	30W
Power Supply	LED Driver		
Input Voltage	120-277V, 50/60Hz		
Power Factor	>0.9		
Surge Protection	2.5kV L-N, 2.5kV L-N-GND		
Driver Type	Constant Current (CC)		
Control	0-10V Dimmable		

Optic Information

LED Type	SMD		
Luminous Flux (±10%)	2024lm	2794lm	3933lm
Efficacy (4000K Ra80)	135 lm/w	145 lm/w	135 lm/w
Correlated Color Temperature	3000K, 4000K, 5000K (Adjustable)		
Color Rendering Index	Ra80		
Beam Angle	100°		
UGR level	<7		

Dimensions and Mount

Product Dimension	8.6" x 5.7" x 3.1"
Luminaire Net Weight	N/A
Export Carton Size	6" x 3.5" x 8.8"
Gross Weight	2.9 lbs
Mounting Option	Flush Mounting
Material	Die-cast Aluminum Polycarbonate
Finish	Powder Coating
Fixture Color	Bronze, Black
IK Rating	N/A
IP Rating	IP65

Lifespan and Warranty

Operating Temperature	-40°F to 113°F
Warranty	5 Years

Safety Certifications

- Luminaires (UL 1598:2021 Ed.5)
- Luminaires (CSA C22.2#250.0:2021 Ed.5)