




## Description

Introducing our cutting-edge LED stairwell light that boasts a range of advanced features to transform your stairwell lighting experience. This premium lighting solution has been designed with superior quality to provide optimal illumination for your stairwell, while also being energy-efficient. The LED stairwell light is built with power adjustable and bi-level dimming, giving you full control over the lighting output. With the power adjustable feature, you can adjust the brightness of the light according to your requirements. The bi-level dimming feature provides you with the option to switch between brightness settings, which can help save on energy costs while providing the perfect amount of light. This is especially beneficial for areas that require different light levels at different times, such as during the day versus at night. The fixture is also CCT tunable which allows for complete flexibility.

## Applications


Stairwells  
General Areas  
Commercial Facilities

## Photometry




120°

## Mounting Options

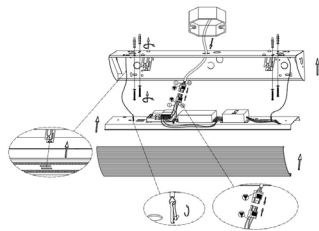

## Dimensions

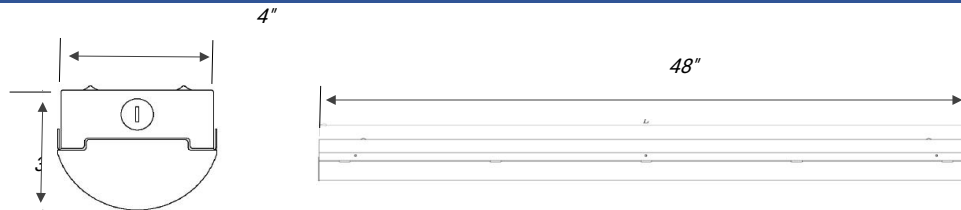

## Accessories

- Occupancy Sensor: Can identify daylight and artificial light, real Lux-off and daylight monitoring function.
  - IR Remote Control
- Default Setting: Sensitivity:100% / Daylight Sensor: 300lux / Hold Time: 5mins. / Twilight Time: + / Twilight Level: 30%

Big Shine LED  
Add: 300 Coporate Blvd, Newburgh, NY 12550  
Phone: 845-444-5255

## Electrical Information

Model No.	AI4-12	AI4-18	AI4-25	AI4-40
Power Consumption(±10%)	12W	18W	25W	40W
Input Voltage	AC 100-277 VAC 50/60 Hz (480VAC Opt)			
Power Factor	0.9			
THD	15.4%			
Driver Type	Class P Programmable LED Driver			
Control	Bi-Level Dimming / 0-10V Dimming			

## Optic Information

LED Type	SMD
Efficacy(4000K Ra80)	145 lm/w
Correlated Color Temperature	3000K, 3500K, 4000K, 5000K (CCT Tunable)
Color Rendering Index	Ra80
Beam Angle	120°
UGR level	N/A

## Dimensions and Mounts

Product Dimension	3" x 4" x 48"
Luminaire Net Weight	3.48 Lbs
Mounting Option	Surface Mount / Suspension Mount
Material	Steel frame / Acrylic diffuser
Finish	Powder Coated
Fixture Color	White
IK Rating	IK08
IP Rating	IP40

## Lifespan and Warranty

Operating Temperature	-4° to 113°F
Warranty	5 Years

## Safety Certifications

Luminaires (UL 1598:2021 Ed.5)  
Luminaires (CSA C22.2#250.0:2021 Ed.5)