

HUBBLE Flood Light/High Bay


Big Shine LED's Hubble is double-classified as a high bay and flood light, due to its versatility, and can also serve as an area light when mounted on a pole. Manufactured with an anodized aluminum die-casting, Hubble's metallic surface has a durable and corrosion-resistant finish.

This fixture's innovative design can accommodate multiple, low maintenance LED modules.

The Hubble is tolerant to dust ingress and water submission, making it ideal for various types of applications.



DIMENSIONS

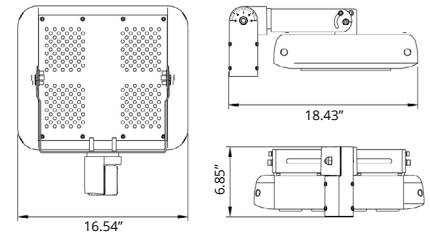

APPLICATIONS

Industrial, Commercial, Recreational

MODEL OPTIONS

| Manufacturer | Fixture Type | Wattage | Voltage | Name | Driver | Chip | CCT (X) | Beam Angle (Y) |
|-------------------|--------------|---------|---------------------------------|------|--------------|----------|------------------------|----------------|
| BSL BIG SHINE LED | HB High Bay | 300W | 100-277V G-277-480V Optional | HBL | MW Mean Well | OS OSRAM | 4000K, 5000K, 5700K | 60°, 90° |

TECHNICAL SPECIFICATIONS


| | 300W |
|--------------------------|--------------------|
| Lumens | 36,000 |
| Efficacy | 120 |
| CRI | >75 (5000K) |
| Voltage Input | 100-277V |
| Voltage Output | 44V |
| Amperage | 6 |
| Hertz | 50-60 Hz |
| THD | <10% |
| Control Options | 0-10V Optional (T) |
| Operating Temp. | -40~122°F |
| IP Rating | IP67 |
| IK Level | IK08 |
| NET Weight | 18.7 lb |
| Driver Life | 50,000 hrs |
| L70 Results ¹ | 60,000 hrs |

¹ LM80 and TM21 results are available upon request. Specifications are subject to change without notice.


FIELD & BEAM ANGLES

| MODEL | Beam | Height vs. Illuminance (ft vs. lx) | | |
|-----------------------------|-------|------------------------------------|---------|---------|
| | Angle | 9.8 ft | 19.7 ft | 29.5 ft |
| BSL-HB300-HBL-MWOS-4000K-60 | 60 | 3,134.3 | 783.6 | 348.3 |
| BSL-HB300-HBL-MWOS-4000K-90 | 90 | 1,661.5 | 415.4 | 184.6 |
| BSL-HB300-HBL-MWOS-5700K-60 | 60 | 2,896.9 | 724.2 | 321.9 |
| BSL-HB300-HBL-MWOS-5700K-90 | 90 | 1,699.3 | 424.8 | 188.8 |


PHOTOMETRICS




300W-4000K-60°



300W-4000K-90°



300W-5700K-60°



MOUNTING OPTIONS

Yoke Bracket

STANDARD COLOR OPTIONS



Silver

*Customized colors available upon RAL request. MOQ applies.

