

HUBBLE Flood Light/High Bay


Big Shine LED's Hubble is double-classified as a high bay and flood light, due to its versatility, and can also serve as an area light when mounted on a pole. Manufactured with an anodized aluminum die-casting, Hubble's metallic surface has a durable and corrosion-resistant finish.

This fixture's innovative design can accommodate multiple, low maintenance LED modules.

The Hubble is tolerant to dust ingress and water submission, making it ideal for various types of applications.



DIMENSIONS

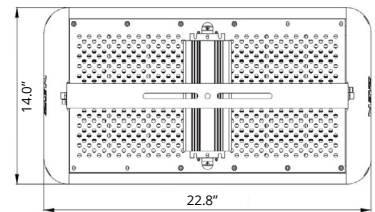

APPLICATIONS

Industrial, Commercial, Recreational

MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	HB High Bay	400W	100-277V G-277-480V Optional	HBL	MW Mean Well	OS OSRAM	4000K, 5000K, 5700K	60°, 90°

TECHNICAL SPECIFICATIONS


	400W
Lumens	46,000
Efficacy	115
CRI	>75 (5000K)
Voltage Input	100-277V
Voltage Output	44V
Amperage	4.5
Hertz	50-60 Hz
THD	<10%
Control Options	0-10V Optional (T)
Operating Temp.	-40~122°F
IP Rating	IP67
IK Level	IK08
NET Weight	12 lb
Driver Life	50,000 hrs
L70 Results ¹	60,000 hrs

¹ LM80 and TM21 results are available upon request. Specifications are subject to change without notice.


FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-HB400-HBL-MWOS-4000K-60	60	4,329.7	1,082.4	481.1
BSL-HB400-HBL-MWOS-4000K-90	90	2,382.4	595.6	264.7
BSL-HB400-HBL-MWOS-5700K-60	60	4,362.0	1,090.5	484.7
BSL-HB400-HBL-MWOS-5700K-90	90	2,393.1	598.3	265.9


PHOTOMETRICS




400W-4000K-60°



400W-4000K-90°



400W-5700K-60°



400W-5700K-90°

MOUNTING OPTIONS

Yoke Bracket

STANDARD COLOR OPTIONS



Silver

*Customized colors available upon RAL request. MOQ applies.

