

PANDORA Flood Light

Pandora's robust design is suitable for any general-floodlighting applications. This Big Shine LED flood has optimized thermal management technology with an integrated die-cast aluminum housing.


It's made with tempered and shatter-resistant glass for durability and carries an IP65 rating ideal for various outdoor applications, requiring minimal maintenance.

APPLICATIONS

Industrial, Commercial, Recreational



DIMENSIONS

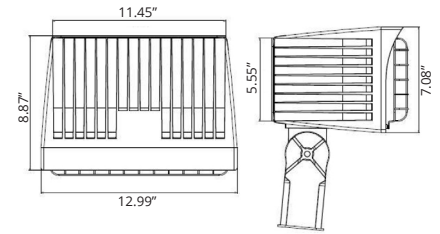

MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	FL Flood Light	120W	100-277V G-347-480V Optional	PDA	MW Meanwell	NI Nichia	5000K	NEMA 6Hx6V

TECHNICAL SPECIFICATIONS


	120W
Lumens	15,600
Efficacy	130
CRI	75 (5000K)
Voltage Input	100-277V
Amperage	1
Hertz	50-60 Hz
Total Harmonic Dist.	15%
Control Options	0-10V Optional (T)
Operating Temp.	-31~113°F
IP Rating	IP65
IK Level	N/A
Weight	14.88 lb
Drive Life	50,000 hrs
L70 Results ¹	50,000 hrs

¹ LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-FL120-PDA-MWNI-5000K-6Hx6V	6Hx6V	1,145.0	286.3	127.2

PHOTOMETRICS




120W-5000K-6Hx6V

MOUNTING OPTION

Knuckle, Slip Fitter, Trunnion Bracket, Straight Arm

STANDARD COLOR OPTIONS



*Customized colors available upon RAL request. MOQ applies.

