


PANEL 2X4 LED Panel

Big Shine LED's 2x4 panel is a flicker-free fixture with flexible mounting options, making it an ideal fit for multiple types of commercial facilities. Tactical edge-folded backplane assembly allows this fixture to have a strong structure suitable. Its longer lifespan can be accredited to improved heat dissipation. The frame is welded, polished, and powder-coated to produce a seamless look ideal for recessed, flush, and suspended commercial mounting.



DIMENSIONS

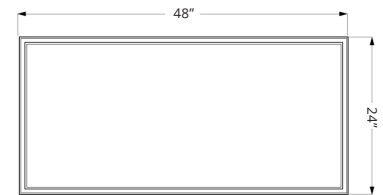

APPLICATIONS

Commercial

MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	PL Panel Light	30W, 40W D-Dimming Optional	100-277V	2X4	BS Big Shine Driver	SN San'an	3000K, 4000K, 5000K	110°


TECHNICAL SPECIFICATIONS

	30W	40W
Lumens	3,900	5,200
Efficacy	130	130
CRI	80 (5000K)	80 (5000K)
Voltage Input	100-277V	100-277V
Voltage Output	28V	28V
Amperage	0.72	0.4
Hertz	50-60 Hz	50-60 Hz
Total Harmonic Dist.	<15%	<15%
Control Options	0-10V Optional (T)	0-10V Optional (T)
Operating Temp.	-4~122°F	-4~122°F
IP Rating	IP20	IP20
IK Level	IK06	IK06
Weight	14.9 lb	14.14 lb
Driver Life	50,000 hrs	50,000 hrs
L70 Results ¹	>54,000 hrs	>54,000 hrs


FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-PL30-2X4-BSSN-5000K-110	110	305.1	33.9	15.1
BSL-PL40-2X4-BSSN-5000K-110	110	183.9	46.0	20.4

PHOTOMETRICS



2X4 30W-5000K-110°




2X4 40W-5000K-110°

¹LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

MOUNTING OPTION

Recessed, Suspended, Flush

STANDARD COLOR OPTIONS



White

