


# PANEL 2X4 LED Panel

Big Shine LED's 2x4 panel is a flicker-free fixture with flexible mounting options, making it an ideal fit for multiple types of commercial facilities. Tactical edge-folded backplane assembly allows this fixture to have a strong structure suitable. Its longer lifespan can be accredited to improved heat dissipation. The frame is welded, polished, and powder-coated to produce a seamless look ideal for recess, flush, and suspended commercial mounting.



## DIMENSIONS

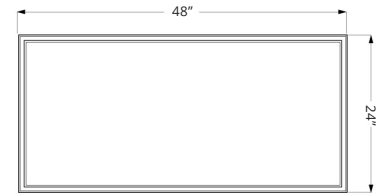

## APPLICATIONS

Commercial

## MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	PL Panel Light	50W D-Dimming Optional	100-277V	2X4	BS Big Shine Driver	SN San'an	3000K-5000K	110°


## TECHNICAL SPECIFICATIONS

	50W	60W
Lumens	6500	
Efficacy	130	
CRI	80 (5000K)	
Voltage Input	100-277V	
Voltage Output	28-42V	
Amperage	0.6	
Hertz	50-60 Hz	
Total Harmonic Dist.	<15%	
Control Options	0-10V Optional (T)	
Operating Temp.	-4~122°F	
IP Rating	IP20	
IK Level	IK06	
Weight	14.14 lb	
Driver Life	50,000 hrs	
L70 Results <sup>1</sup>	>54,000 hrs	


## FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-PL50-2X4-BSSN-5000K-110	110	212.5	53.1	23.6
BSL-PL60-2X4-BSSN-5000K-110	110			

## PHOTOMETRICS



2X4 50W-5000K-110°



2X4 60W-5000K-110°

<sup>1</sup> LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

## MOUNTING OPTIONS

Recessed, Suspended, Flush

## STANDARD COLOR OPTIONS

