

# PHOENIX High Bay

Phoenix's modern and compact design makes this Big Shine LED high bay suitable for numerous facility applications.

Optional aluminum shields are ideal accessories that provide multiple beam angle possibilities based on the need of the desired area of illumination.


It's also compatible with occupancy and daylight sensors, giving more control to the customer while helping to reduce energy consumption.

## APPLICATIONS

Industrial, Commercial, Recreational



## DIMENSIONS & ACCESSORIES

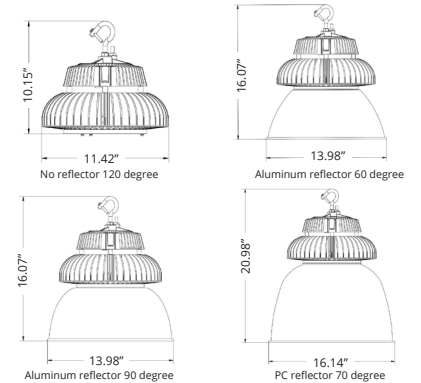

## MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	HB High Bay	240W	100-277V G-277-480V Optional	PHX	MW Mean Well	NI Nichia	4000K, 5000K, 5700K	60°, 70°, 90°, 120°

## TECHNICAL SPECIFICATIONS


	240W
Lumens	33,600
Efficacy	140
CRI	83 (5000K)
Voltage Input	100-277V
Voltage Output	48V
Amperage	4.9
Hertz	50-60 Hz
THD	8.13%
Control Options	0-10V Optional (T)
Operating Temp.	-40~122°F
IP Rating	IP65
IK Level	IK08
Weight	14.33 lb
Driver Life	50,000 hrs
L70 Results <sup>1</sup>	60,000 hrs

<sup>1</sup> LM80 and TM21 results are available upon request. Specifications are subject to change without notice.


## FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-HB240-PHX-MWNI-5000K-60	60	2,832	708	314.7
BSL-HB240-PHX-MWNI-5000K-70	70	2,295.3	573.8	255
BSL-HB240-PHX-MWNI-5000K-90	90	1,662	415.5	184.7
BSL-HB240-PHX-MWNI-5000K-120	120	1,296.2	324.0	144.0


## PHOTOMETRICS




240W-5000K-60°



240W-5000K-70°



240W-5000K-90°



240W-5000K-120°

## MOUNTING OPTIONS

Eye Bolt

## STANDARD COLOR OPTIONS



Black

\*Customized colors available upon RAL request. MOQ applies.

