

# PRIMUS I Wall Pack

The Primus I wall pack is armored with a durable aluminum alloy housing designed to be rust- and corrosion-proof. This dust-tight and water-resistant wall pack can be installed in dry or rainy environments. The light is also tightly assembled to be bug-proof.


It is compatible with building control systems and the ability to opt for dusk-to-dawn and occupancy sensors. The Primus I is a practical solution for outdoor lighting needs to promote safety while saving energy.

## APPLICATIONS

Industrial, Commercial, Recreational



## DIMENSIONS

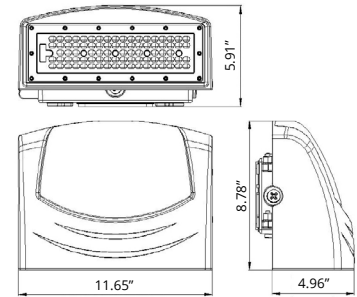

## MODEL OPTIONS

Mftr	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	WP Wall Pack	40W	100-277V G-277-480V Optional	PM1	SO Sosen	NI Nichia	4000K*, 5000K	R08401 Asymmetric

\*IES files currently unavailable.

## TECHNICAL SPECIFICATIONS


	40W
Lumens	6,000
Efficacy	150
CRI	75 (5000K)
Voltage Input	100-277V
Voltage Output	36V
Amperage	0.4
Hertz	50-60 Hz
Total Harmonic Dist.	14.56%
Control Options	0-10V Optional (T)
Operating Temp.	-22 ~122°F
IP Rating	IP65
IK Level	IK08
NET Weight	8.6 lb
Drive Life	50,000 hrs
L70 Results <sup>1</sup>	50,000 hrs

<sup>1</sup> LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

## FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-WP40-PM1-SONI-5000K-R08401	R08401	105.0	26.3	11.7

## PHOTOMETRICS



40W-5000K-R08401°

## MOUNTING OPTIONS

Flush

## STANDARD COLOR OPTIONS



Bronze

\*Customized colors available upon RAL request. MOQ applies.

