

PRIMUS I Wall Pack

The Primus I wall pack is armored with a durable aluminum alloy housing designed to be rust- and corrosion-proof. This dust-tight and water-resistant wall pack can be installed in dry or rainy environments. The light is also tightly assembled to be bug-proof.


It is compatible with building control systems and the ability to opt for dusk-to-dawn and occupancy sensors. The Primus I is a practical solution for outdoor lighting needs to promote safety while saving energy.

APPLICATIONS

Industrial, Commercial, Recreational



DIMENSIONS

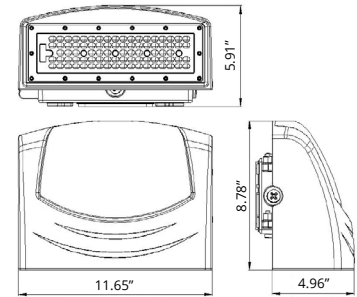

MODEL OPTIONS

Mftr	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	WP Wall Pack	70W	100-277V G-277-480V Optional	PM1	SO Sosen	NI Nichia	4000K*, 5000K	R08401 Asymmetric

*IES files currently unavailable.

TECHNICAL SPECIFICATIONS


	70W
Lumens	9,800
Efficacy	140
CRI	75 (5000K)
Voltage Input	100-277V
Voltage Output	36V
Amperage	0.7
Hertz	50-60 Hz
Total Harmonic Dist.	14.65%
Control Options	0-10V Optional (T)
Operating Temp.	-22~122°F
IP Rating	IP65
IK Level	IK08
NET Weight	8.8 lb
Drive Life	50,000 hrs
L70 Results ¹	50,000 hrs

¹ LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-WP70-PM1-SONI-5000K-R08401	R08401	185.2	46.3	20.6

PHOTOMETRICS



70W-5000K-R08401°

MOUNTING OPTIONS

Flush

STANDARD COLOR OPTIONS



Bronze

*Customized colors available upon RAL request. MOQ applies.

