

# SATELLITE ULTRA High Bay

Satellite Ultra is a new rendition of an existing Big Shine LED high bay upgraded with a skillfully-engineered optics package that produces uniform light upon application.

Its rotatable brackets and eyebolt mounting options make it flexible for different installations inside and outside of the facility.


Though lightweight, this high bay delivers a high efficacy results ideal for high ceilings and broad spaces.

## APPLICATIONS

Industrial, Commercial, Recreational



## DIMENSIONS

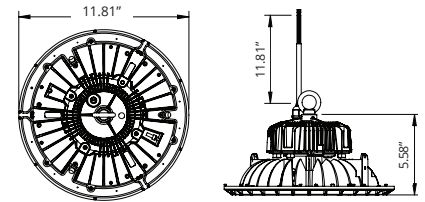

## MODEL OPTIONS

| Manufacturer      | Fixture Type | Wattage | Voltage                         | Name | Driver       | Chip         | CCT (X) | Beam Angle (Y) |
|-------------------|--------------|---------|---------------------------------|------|--------------|--------------|---------|----------------|
| BSL BIG SHINE LED | HB High Bay  | 150W    | 100-277V<br>G-277-480V Optional | SEU  | MW Mean Well | GN Lextar II | 5000K   | 120°           |

## TECHNICAL SPECIFICATIONS


|                          | 150W               |
|--------------------------|--------------------|
| Lumens                   | 22,500             |
| Efficacy                 | 150                |
| CRI                      | 85 (5000K)         |
| Voltage Input            | 100-277V           |
| Voltage Output           | 45V                |
| Amperage                 | 1.7                |
| Hertz                    | 50-60 Hz           |
| THD                      | 15%                |
| Control Options          | 0-10V Optional (T) |
| Operating Temp.          | -22~122°F          |
| IP Rating                | IP65               |
| IK Level                 | N/A                |
| Weight                   | 10.58 lb           |
| Driver Life              | 50,000 hrs         |
| L70 Results <sup>1</sup> | 60,000 hrs         |

<sup>1</sup>LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

## FIELD & BEAM ANGLES

| MODEL                        | Beam  | Height vs. Illuminance (ft vs. lx) |         |         |
|------------------------------|-------|------------------------------------|---------|---------|
|                              | Angle | 9.8 ft                             | 19.7 ft | 29.5 ft |
| BSL-HB150-SEU-MWGN-5000K-120 | 120   | 844.4                              | 211.1   | 93.8    |

## PHOTOMETRICS




150W-5000K-120°

## MOUNTING OPTIONS

Eye Bolt, Yoke Bracket

## STANDARD COLOR OPTIONS



\*Customized colors available upon RAL request. MOQ applies.

