

# SKY X High Bay

Big Shine LED's brilliant Sky X high bay is engineered to powerfully illuminate any facility, delivering light above and below the fixture.

The Sky X is able to create a uniform environment, eliminating dark ceilings.


Sky X has an IP65 rating, which makes it suitable for indoor and semi-outdoor application.

## APPLICATIONS

Industrial, Commercial, Recreational



## DIMENSIONS

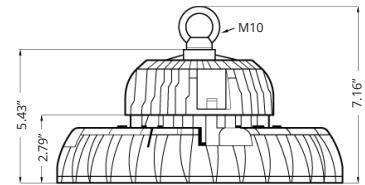

## MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	HB High Bay	150W, 200W, 240W	100-277V	SKX	MW Mean Well	LM Lumileds	3000K, 4000K, 5000K, 5700K	60°, 90°, 120°


## TECHNICAL SPECIFICATIONS

	150W	200W	240W
<b>Lumens</b>	24,000	33,000	38,400
<b>Efficacy</b>	160	165	160
<b>CRI</b>	70 (5000K)	70 (5000K)	70 (5000K)
<b>Voltage Input</b>	100-277V	100-277V	100-277V
<b>Amperage</b>	0.62	0.9	1
<b>Hertz</b>	50-60 Hz	50-60 Hz	50-60 Hz
<b>THD</b>	15%	15%	15%
<b>Control Options</b>	0-10V Optional (T)	0-10V Optional (T)	0-10V Optional (T)
<b>Operating Temp.</b>	-40~122°F	-40~122°F	-40~122°F
<b>IP Rating</b>	IP65	IP65	IP65
<b>IK Level</b>	IK08	IK08	IK08
<b>Weight</b>	10 lb	13.7 lb	13.7 lb
<b>Driver Life</b>	50,000 hrs	50,000 hrs	50,000 hrs


## FIELD & BEAM ANGLES

MODEL	Beam Angle	Height vs. Illuminance (ft vs. lx)		
		9.8 ft	19.7 ft	29.5 ft
BSL-HB150-SKX-MWLM-5000K-90	90	1,444.5	361.1	160.5
BSL-HB150-SKX-MWLM-5000K-120	120	743.3	185.8	82.6
BSL-HB200-SKX-MWLM-5000K-90	90	1,943.3	485.8	215.9
BSL-HB200-SKX-MWLM-5000K-120	120	1,052.9	263.2	117.0
BSL-HB240-SKX-MWLM-5000K-90	90	2,251.1	562.8	250.1
BSL-HB240-SKX-MWLM-5000K-120	120	1,183.3	295.8	131.5


## PHOTOMETRICS




150W-5000K-90°




150W-5000K-120°




200W-5000K-90°



200W-5000K-120°



240W-5000K-90°




240W-5000K-120°

## MOUNTING OPTIONS

Eye Bolt, Yoke Bracket

## STANDARD COLOR OPTIONS



Black

\*Customized colors available upon RAL request. MOQ applies.

