

LED TROFFER 2X4 Troffer

The Big Shine LED 2x4 troffer has a great structure and design for easy installation. This luminaire was engineered as an energy efficient and eco-friendly retrofit.




The simple design of our Troffer/Retrofit Kit provides maximum light distribution, which is ideal for commercial and industrial applications. Available with 0-10V dimming capability.

APPLICATIONS

Residential: Apartment Buildings, Lobbies, etc.

Commercial: Office Buildings, Conference Halls, Corridors, Tennis Centers, Advertisement Lightboxes, Basements, Laundromats, etc.

DIMENSIONS

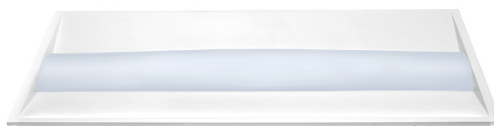

MODEL OPTIONS

Mftr	Fixture Type	Wattage	Name	Driver	Chip	Color	Beam Angle
BSL BIG SHINE LED	TR Troffer	40W, 50W	2X4	GN Generic	GN Generic	3000K-5000K	113°, 118°


TECHNICAL SPECIFICATIONS

	40W	50W
Lumens	5200	6500
Efficacy	130	130
CRI	>80	>80
Voltage Input	100-277V	100-277V
Voltage Output	25-40V	25-40V
Amperage	1000	1000
Hertz	50-60Hz	50-60Hz
Total Harmonic Dist.	<20%	<20%
Dimmability	Dimmable	Dimmable
Operating Temp.	-40~140°F	-40~140°F
IP Rating	IP20	IP20
IK Level	IK06	IK06
Weight	15.43 lb	15.43 lb
Lifetime	50,000 hrs	50,000 hrs


FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (Ft vs Lux)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-TR40-2X4-GNGN-4000K-113	113	192.0	48.0	21.3
BSL-TR50-2X4-GNGN-4000K-118	118	207.3	51.8	23.0

PHOTOMETRICS



2X4 40W-4000K-113°




2X4 50W-4000K-118°

MOUNTING OPTION

Recessed Mount / Flush Mount / Suspension

COLOR OPTIONS



*Customized colors available upon RAL request. MOQ applies.

