

# ALIOTH Wall Pack

Big Shine LED's Alioth wall pack provides a greener solution and an ideal replacement for traditional metal halide and high-pressure sodium lamps.

The optics' design softens and emits a uniform distribution of light, making it easy on the eyes. It's also equipped with a shatter-resistant glass cover that can tolerate thermal shock.


The Alioth is not only easy to install, but also easy to operate with low maintenance requirements.

## APPLICATIONS

Industrial, Commercial, Recreational



## DIMENSIONS

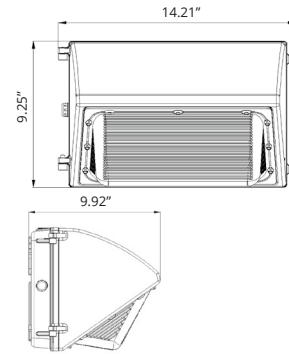

## MODEL OPTIONS

Mftr	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	WP Wall Pack	35W, 40W	100-277V G- 277-480V Optional	ALI	BS Big Shine Driver	HG Hongli	4000K, 4500K, 5000K, 5700K	110°


## TECHNICAL SPECIFICATIONS

	35W	40W
Lumens	4,550	4,800
Efficacy	130	120
CRI	>80 (5000K)	>80 (5000K)
Voltage Input	100-277V	100-277V
Voltage Output	36-48V	36-48V
Amperage	0.73	0.83
Hertz	50-60 Hz	50-60 Hz
Total Harmonic Dist.	<20%	<20%
Control Options	N/A	N/A
Operating Temp.	-4~113°F	-4~113°F
IP Rating	IP65	IP65
IK Level	N/A	N/A
Weight	7.01 lb	7.23 lb
Driver Life	50,000 hrs	50,000 hrs
L70 Results	50,000 hrs	50,000 hrs


## FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-WP35-ALI-BSHG-4000K-110	110	133.1	33.3	14.8
BSL-WP40-ALI-BSHG-4000K-110	110	165.1	41.3	18.3

## PHOTOMETRICS



35W-4000K-110°



40W-4000K-110°

<sup>1</sup> LM80 and TM21 results are available upon request. Specifications are subject to change without notice.

## MOUNTING OPTIONS

Flush

## STANDARD COLOR OPTIONS



\*Customized colors available upon RAL request. MOQ applies.

