

CALLISTO II Canopy Light

Big Shine LED's Callisto II is an ideal fixture for dark spaces that need abundant illuminance with little effort. Its striped lens was crafted to create uniform light in tandem with the fixture's wide beam angle.

The Callisto II, built with an aluminum housing, is not only easy to install and operate, but can thrive in damp and dusty environments, indoor and outdoor.


It has versatile application options like gas stations and parking garages.

APPLICATIONS

Industrial, Commercial, Recreational



DIMENSIONS

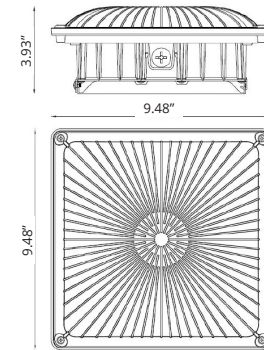

MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT	Beam Angle
BSL BIG SHINE LED	CP Canopy	35W, 55W	100-277V	CL2	SO Sosen	PH Philip	4000K, 4500K, 5000K, 5700K	150°


TECHNICAL SPECIFICATIONS

	35W	55W
Lumens	4,025	6,490
Efficacy	115	118
CRI	>75 (5000K)	>75 (5000K)
Voltage Input	100-277V	100-277V
Voltage Output	36-48V	36-48V
Amperage	0.4	0.6
Hertz	50-60 Hz	50-60 Hz
Total Harmonic Dist.	<20%	<20%
Control Options	Non-Dimmable	Non-Dimmable
Operating Temp.	4~113°F	4~113°F
IP Rating	IP65	IP65
IK Level	NA	NA
Weight	4.52 lb	4.74 lb
Drive Life	50,000 hrs	50,000 hrs


FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-CP35-CL2-SOPH-5700K-150	150	96.0	24.0	10.7
BSL-CP55-CL2-SOPH-4000K-150	150	152.6	38.1	17.0

PHOTOMETRICS



35W-5700K-150°




55W-4000K-150°

MOUNTING OPTIONS

Flush, Recessed

STANDARD COLOR OPTIONS



White

*Customized colors available upon RAL request. MOQ applies.

