

CAPELLA Canopy Light

Big Shine LED's Capella canopy light offers a wide beam angle, enabling an even spread of light to illuminate dark areas more efficiently.


There is also the option to have an integrated occupancy sensor and aluminum alloy heat sink to support the fixture's longevity.

APPLICATIONS

Commercial, Industrial, Recreational



DIMENSIONS

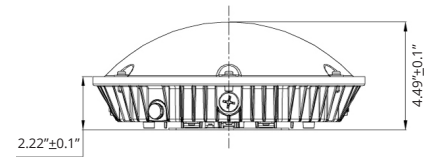

MODEL OPTIONS

Manufacturer	Fixture Type	Wattage	Voltage	Name	Driver	Chip	CCT (X)	Beam Angle (Y)
BSL BIG SHINE LED	CP Canopy	40W, 60W	100-277V	CAP	GN BSL Driver	NI Nichia	4000K, 5000K, 5700K	160°


TECHNICAL SPECIFICATIONS

	40W	60W
Lumens	5,200	7,800
Efficacy	130	130
CRI	85 (5000K)	85 (5000K)
Voltage Input	100-277V	100-277V
Amperage	0.88	1.3
Hertz	50-60 Hz	50-60 Hz
Total Harmonic Dist.	17.68%	14.51%
Control Options	0-10V Optional (T)	0-10V Optional (T)
Operating Temp.	-4~104°F	-4~104°F
IP Rating	IP65	IP65
IK Level	IK08	IK08
Weight	6.83 lb	8.6 lb
Driver Life	50,000 hrs	50,000 hrs


FIELD & BEAM ANGLES

MODEL	Beam	Height vs. Illuminance (ft vs. lx)		
	Angle	9.8 ft	19.7 ft	29.5 ft
BSL-CP40-CAP-GNNI-5000K-160	160	94.3	23.6	10.5
BSL-CP60-CAP-GNNI-5000K-160	160	147.8	36.9	16.4

PHOTOMETRICS



40W-5000K-160°




60W-5000K-160°

MOUNTING OPTIONS

Flush, Pendant

STANDARD COLOR OPTIONS



White

