






## DESCRIPTION

Introducing the CPX LED Canopy, the perfect lighting solution for outdoor areas such as gas stations, parking lots, and other covered locations. The CPX LED Canopy is designed to provide high-quality lighting while being energy-efficient and environmentally friendly. The wattage range of this product is between 150-240 watts, providing an ample amount of light while still being energy-efficient.

## APPLICATION(S)

- Parking Garages
- Commercial Canopies

## PHOTOMETRY



## MOUNTING OPTIONS

- Flush Mount

Catalog Number	
Notes	
Type	

## TECHNICAL SPECIFICATIONS

<b>Model No.</b>	CPX-150	CPX-180	CPX-240
<b>Power Consumption(±10%)</b>	150W	180W	240W
<b>Power Supply</b>	LED Driver		
<b>Input Voltage</b>	120-277V, 50/60Hz		
<b>Power Factor</b>	>0.9		
<b>Surge Protection</b>	10kV L/N-PE, 6kV L-N		
<b>Driver Type</b>	Constant Current (CC)		
<b>Control</b>	1-10V Dimmable		

## OPTIC SPECIFICATIONS

<b>LED Type</b>	SMD		
<b>Luminous Flux (±10%)</b>	21043lm	25403lm	34448lm
<b>Efficacy (4000K Ra80)</b>	140 lm/w		
<b>Correlated Color Temperature</b>	4000K, 4500K, 5000K, 5700K		
<b>Color Rendering Index</b>	Ra80		
<b>Beam Angle</b>	110°		
<b>UGR level</b>	<6		

## MOUNTING AND PRODUCT DIMENSIONS

<b>Product Dimension</b>	20.5" x 20.5" x 5"		
<b>Luminaire Net Weight</b>	17 lbs	17.3 lbs	17.5 lbs
<b>Export Carton Size</b>	22" x 22" x 6.3"		
<b>Mounting Option</b>	Flush Mount		
<b>Material</b>	Die-Cast Aluminum Polycarbonate		
<b>Finish</b>	Powder Coating		
<b>Fixture Color</b>	White		
<b>IK Rating</b>	N/A		
<b>IP Rating</b>	IP65		

## LIFESPAN AND WARRANTY


<b>Operating Temperature</b>	-40°F to 113°F
<b>Warranty</b>	5 Years

## SAFETY CERTIFICATIONS

- Luminaires (UL 1598:2021 Ed.5)
- Luminaires (CSA C22.2#250.0:2021 Ed.5)

## DIMENSIONS

150W-240W

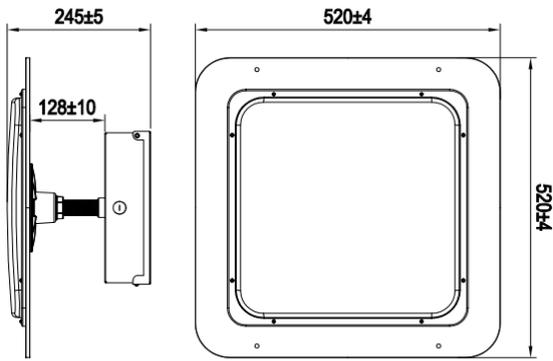

## ORDERING INFORMATION

Series	Wattage & Lumen Output	Voltage	Correlated Color Temperature (CCT)	Beam Angle	Control Option
CPX (CPX LED Canopy Light)	<b>150W</b> (21,043lm) <b>180W</b> (25,403lm) <b>240W</b> (34,448lm)	<b>MV</b> (120-277V)	<b>40K</b> (4000K) <b>45K</b> (4500K) <b>50K</b> (5000K) <b>57K</b> (5700K)	<b>110D</b> (110°)	<b>1-10V</b> (1-10V Dimming)
Finish Color	Mounting Option	Accessories			
<b>WH</b> (White)	<b>FM</b> (Flush Mount)	<b>EMB</b> (Battery Back-up)			