



Note: The end tip colors are changeable.

Catalog Number	
Notes	
Type	

TECHNICAL SPECIFICATIONS

Model No.	TB15-T54	TB18-T54	TB24-T54
Power Consumption(±10%)	15W	18W	24W
Power Supply	LED Driver		
Input Voltage	AC 100-277 VAC 50/60 Hz		
Power Factor	0.9		
THD	20.00%		
Control	Non-dimmable		

OPTIC SPECIFICATIONS

LED Type	SMD		
Luminous Flux (±10% 130 lms/w)	1950 lms	2340 lms	3120 lms
Luminous Flux Options	S-190 lms/w, T-160 lms/w, H-130 lms/w		
Correlated Color Temperature	2700K, 3000K, 4000K, 4500K, 5000K, 6000K, 6500K		
Color Rendering Index	Ra80		
Beam Angle	140°		
UGR level	N/A		

MOUNTING AND PRODUCT DIMENSIONS

Product Dimension (L)	45.7"
Carton Gross Weight (25 units)	24.2 lbs
Carton Size (25 units) (LxWxH)	47.2x7.4x4.7
Mounting	Single End, Double End
Socket Type	G5 bi-pin socket (shunted and non-shunted)
Material	Aluminum Polycarbonate Lens
Fixture Color	Clear or Frosted Lens Available
IK Rating	N/A
IP Rating	IP20

LIFESPAN AND WARRANTY

Operating Temperature	-40°F to 104°F
Warranty	5 Years

SAFETY CERTIFICATIONS

Luminaires (UL 1598:2021 Ed.5)
Luminaires (CSA C22.2#250.0:2021 Ed.5)


DESCRIPTION

Introducing the LED T5 tube, a high-performance lighting solution that offers unmatched brightness and energy efficiency. With a power output of up to 24 watts and an impressive efficiency rating of 130-190 lumens per watt, this LED tube is designed to provide reliable, long-lasting illumination for a wide range of applications. One of the standout features of the LED T5 tube is its versatility, thanks to the availability of both single-end. This allows for easy installation and customization to suit your specific lighting needs. Whether you're looking for a lighting solution for your office, warehouse, or retail space, the LED T5 tube is an excellent choice. With its sleek design, easy installation, and exceptional performance, it's a reliable and cost-effective lighting solution that you can depend on for years to come.

APPLICATION(S)

- Warehouses
- Offices
- Retail Spaces
- Hospitals and Healthcare


PHOTOMETRY

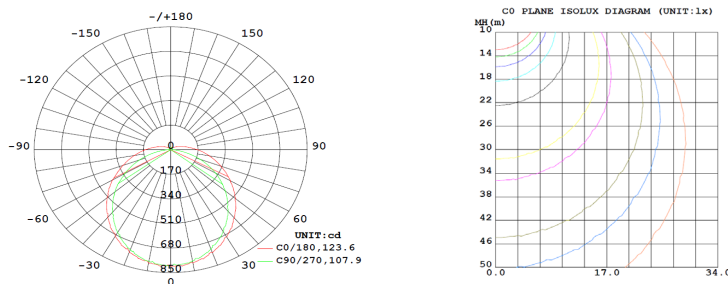

MOUNTING OPTIONS

Single End, Double End

DIMENSIONS

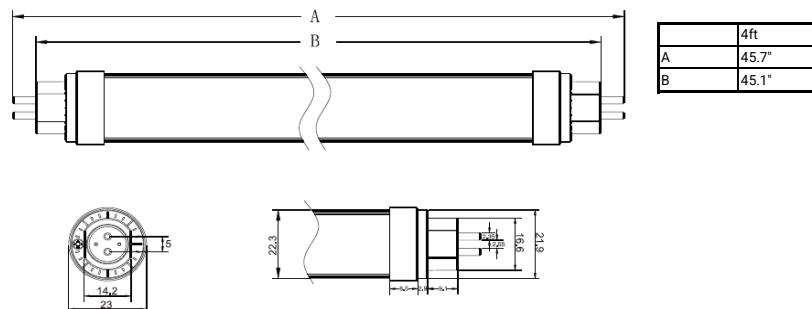

ORDERING INFORMATION

T5 B 4 ft						
Series	Wattage & Lumen Output	Voltage	Correlated Color Temperature (CCT)	Beam Angle	Socket Type	Lens Type
T5 B 4 ft (T5 Type B 4ft LED Tube)	15W (1950 lms)	MV (100-277V)	27K (2700K)	140D (140°)	SE (Single-End Power)	CL (Clear)
	18W (2340 lms)		30K (3000K)		DE (Double-End Power)	FR (Frosted)
	24W (3120 lms)		40K (4000K)			
			45K (4500K)			
			50K (5000K)			
			60K (6000K)			
			65K (6500K)			