






DESCRIPTION

The 8ft T8 LED Tube is a high-performance lighting solution designed for energy efficiency, durability, and superior brightness. Available in 22W, 26W, and 32W options, it delivers 125 lumens per watt for bright and consistent illumination. With CCT options of 3000K, 4000K, and 5000K, it adapts to various lighting needs. Featuring a sturdy aluminum housing and a high-quality polycarbonate lens in clear or frosted finishes, it ensures durability and optimal light diffusion. Engineered for low energy consumption, it helps reduce electricity costs while minimizing environmental impact. With a long lifespan and minimal maintenance, this 8ft T8 LED Tube is a reliable, cost-effective choice for commercial, industrial, and residential applications.

KEY FEATURES

- Internal driver available with dual mode (UL Type A and Type B)
- Wide range of color temperature options available from 3000K to 5000K
- Aluminum shell and polycarbonate lens makes this tube shatter-proof, with clear and frosted lens options


PHOTOMETRY



APPLICATIONS

- Commercial warehouses and office spaces
- Healthcare facilities
- School buildings

DIMENSIONS

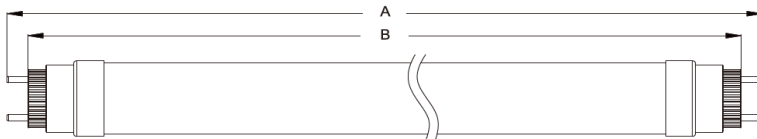

	8ft
A	2368 mm
B	Dependant on sockets chosen

Catalog Number	
Notes	
Type	

TECHNICAL SPECIFICATIONS

Model No.	T88-22	T88-26	T88-32
Power Consumption(±10%)	22W	26W	32W
Power Supply	BSL Driver		
Input Voltage	AC 100-277 VAC 50/60 Hz		
Power Factor	>0.9		
THD	15%		
Control	Not Dimmable		

OPTIC SPECIFICATIONS

LED Type	SMD2835		
Luminous Flux (C/F Lens)	2750lm/2530lm	3250lm/2990lm	4000lm/3680lm
Efficacy Options (4000K Ra80)	125 lm/w		
Correlated Color Temperature	3000K, 4000k, 5000K		
Color Rendering Index	Ra80		
Beam Angle	120°/140°		
UGR level	N/A		

MOUNTING AND PRODUCT DIMENSIONS

Product Dimension (L)	2368±1mm
Mounting	G13 + R17D / Fa8
Material	Aluminum Polycarbonate Lens
Fixture Color	Clear or Frosted Lens Available
IK Rating	N/A
IP Rating	IP20

LIFESPAN AND WARRANTY

Operating Temperature	-40°F to 104°F
Warranty	5 Years

SAFETY CERTIFICATIONS

- Luminaires (UL 1598:2021 Ed.5)
- Luminaires (CSA C22.2#250.0:2021 Ed.5)

ORDERING INFORMATION

T88						
Series	Wattage & Lumen Output	Voltage	Correlated Color Temperature (CCT)	Beam Angle	Socket Type	Lens Type
T88 ft (LED Type B Tube)	22W (2750 lms/clear)	MV (100-277V)	30K (3000K)	120D (120°)	SE (Single-End Power)	CL (Clear)
	26W (3250 lms/clear)		40K (4000K)	140D (140°)	DE (Double-End Power)	FR (Frosted)
	32W (4000 lms/clear)		50K (5000K)			